

EN

XL-END



Coretec®



Your Coretec® floor, made with care

We have a passion for providing a wide selection of authentic natural looks, so you can express what makes you, you. Persistent in product innovation – including micro-beveled edges, enhanced painted bevels & Embossed in Register technology – we create the most appealing designs & textures available.

When choosing a floor from this collection, you choose for a warm atmosphere and a powerful look. The exceptionally long planks are no less than **2.10 meters long and 15 mm thick**. Thanks to the extra thick wear layer of 0.8 mm, these classy floors score excellently in terms of wear and impact resistance.

Trust in every step

Choosing the right floor can be overwhelming. Some people prioritise aesthetics, some go for quality and others opt for ease of use. Instead of compromising, we've combined the best of all worlds in one floor: Coretec®. Aesthetically refined, but also exceptionally durable. Comfortable to walk on, yet also waterproof and wear resistant. Easy to install and maintain.

That's trust in every step.



Warm feeling thanks to our cork backing


All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

Easy to maintain

Cleaning our floors is child's play. Thanks to our high performance wear layers, Coretec® floors are easy to clean and easy to maintain.

Spilled something? No worries, you can easily clean it up, using your floor cleaner or our recommended Coretec® Cleaning Kit.

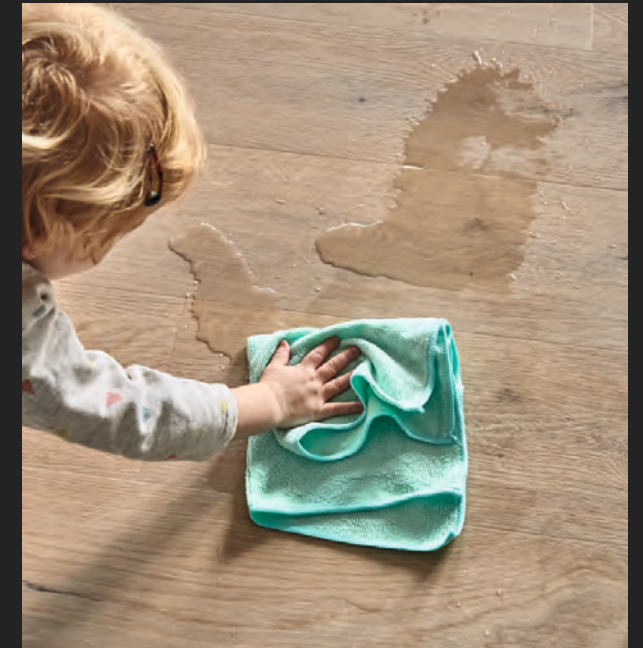

100% waterproof floors


Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all Coretec® floors come with a lifetime residential warranty.

Time saving solution


Coretec® is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.

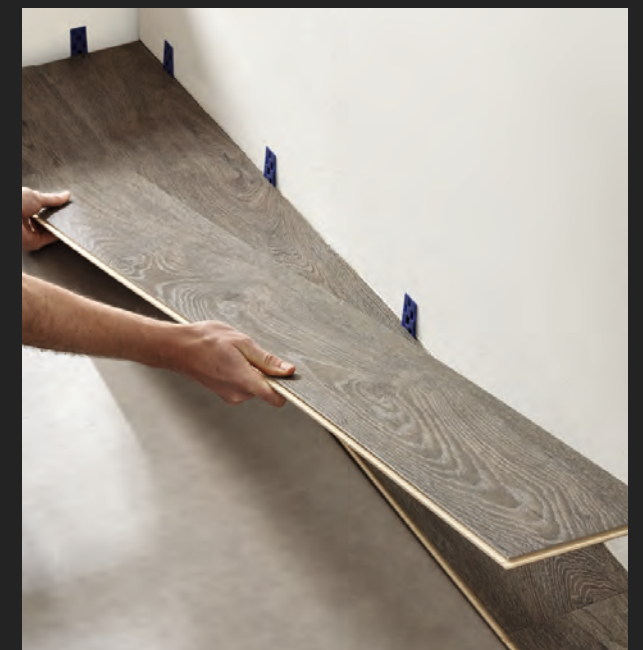

Sound Core® 15 mm

Extra long, Extra strong

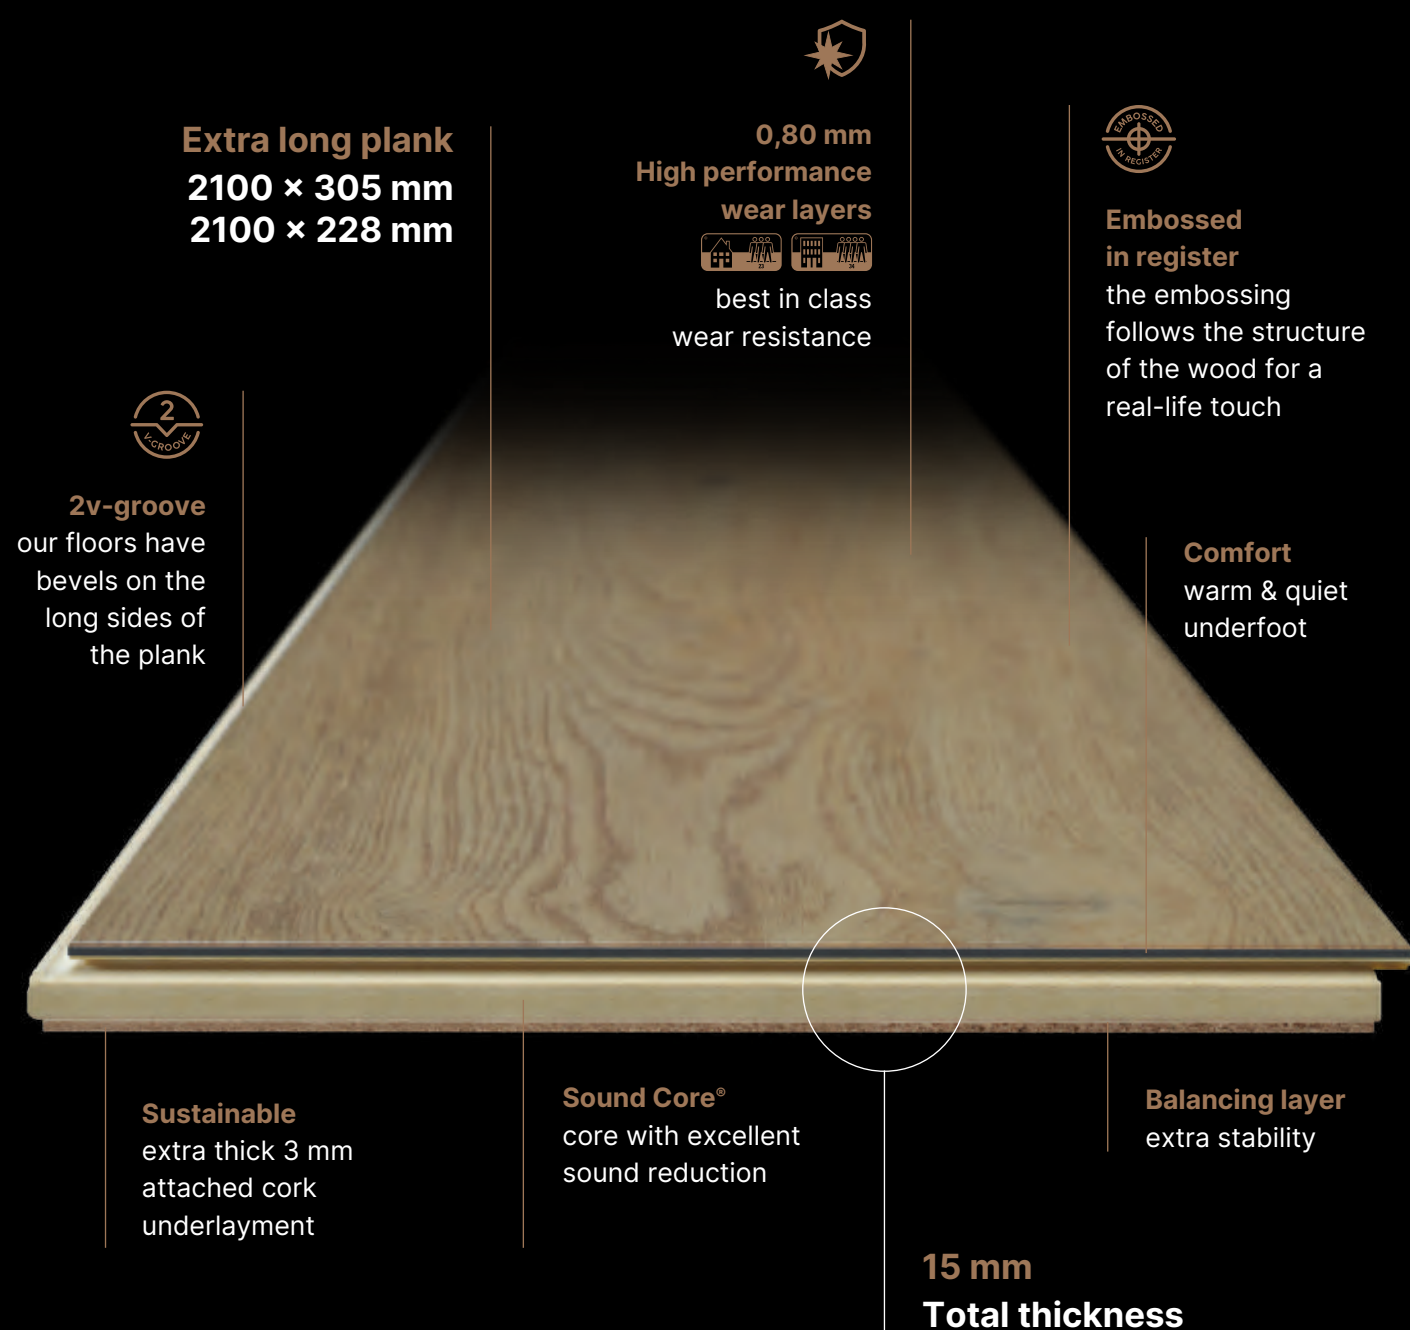

**Best in class
wear resistance**



100% waterproof



Easy to install



**Electrostatic
performance**



Extremely stable



Reduces noise



**No acclimatisation
necessary**



Pet proof



**Installation
on any surface**




**Ideal for underfloor
heating & cooling**


An exclusive waterproof selection




Kylemore
50 LVREXL 4355




Chambord
50 LVREXL 4358




Saumur
50 LVREXL 4384



Monte
50 LVREXL 5188



Alhambra
50 LVREXL 5183




Bled
50 LVREXL 5152




Kantara
50 LVREXL 2515




Egmont
50 LVREXL 2553



Belvoir
50 LVREXL 2594




Montclair
50 LVREXL 2557



Windsor
50 LVREXL 2683



Fonteneau
50 LVREXL 2686



Chantilly
50 LVREXL 2599



Kylemore

50 LVREXL 4355

2100 × 305 × 15 mm

XL-END





Chambord

50 LVREXL 4358

2100 × 305 × 15 mm

XL-END



Chambord - 50 LVREXL 4358




XL-END

15

XL-END

14

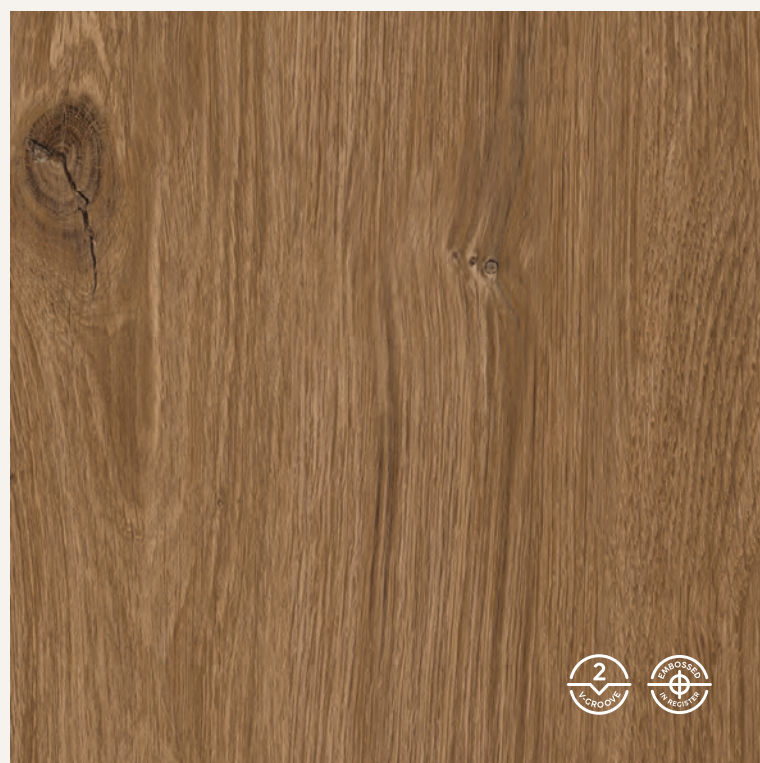

Saumur

50 LVREXL 4384

2100 × 305 × 15 mm

XL-END





Monte

50 LVREXL 5188

2100 × 228 × 15 mm

XL-END





Alhambra

50 LVREXL 5183


2100 × 228 × 15 mm

XL-END



XL-END

XL-END

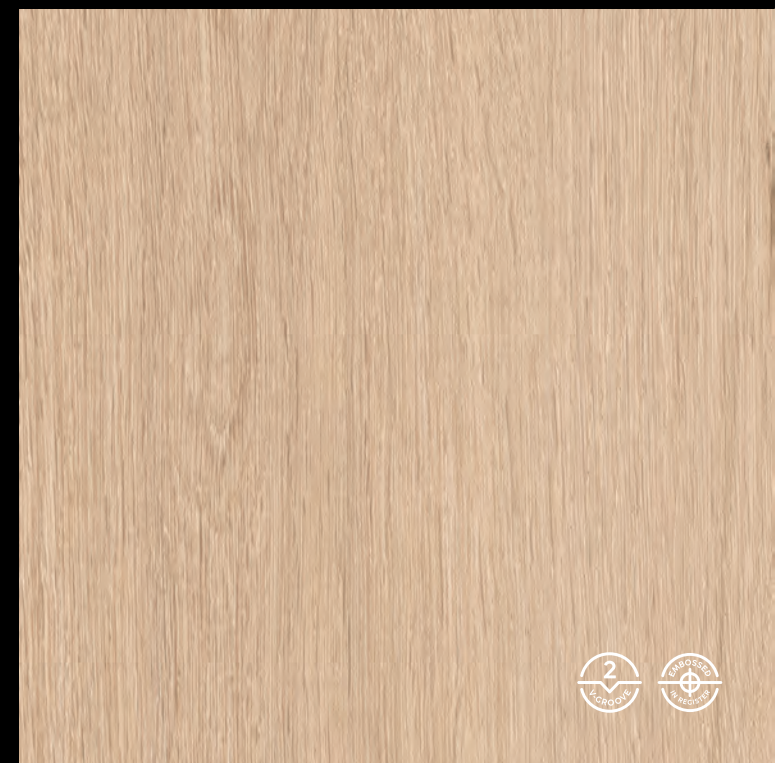

Bled

50 LVREXL 5152

2100 × 228 × 15 mm

XL-END



Kantara

50 LVREXL 2515

2100 × 228 × 15 mm

XL-END





Egmont

50 LVREXL 2553

2100 × 228 × 15 mm

XL-END







Belvoir

50 LVREXL 2594

2100 × 228 × 15 mm

XL-END





Montclair

50 LVREXL 2557

2100 × 228 × 15 mm

XL-END







Windsor

50 LVREXL 2683

2100 × 228 × 15 mm

XL-END






Fonteneau

50 LVREXL 2686

2100 × 228 × 15 mm

XL-END

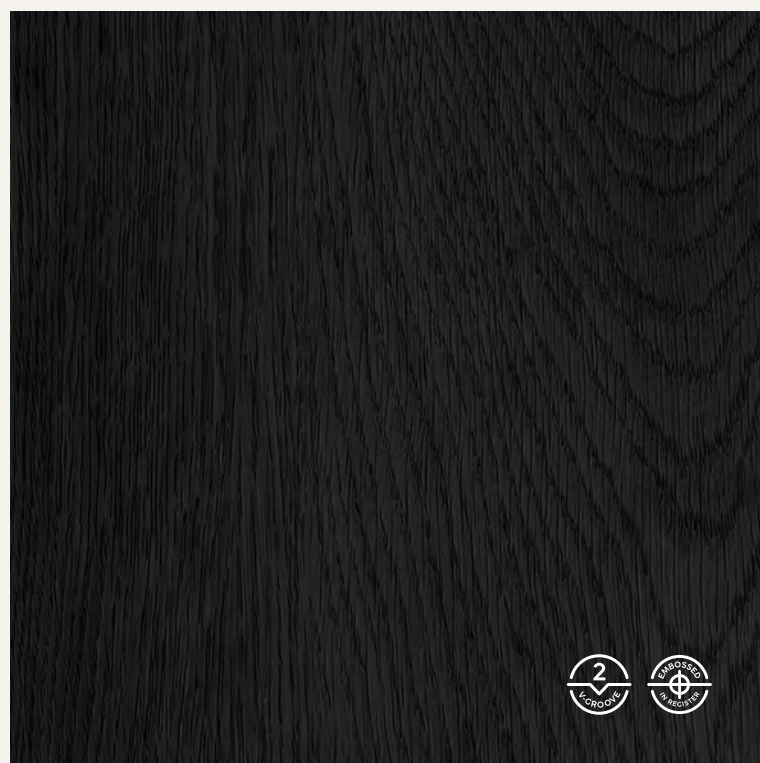

Chantilly

50 LVREXL 2599

2100 × 228 × 15 mm

XL-END





Chantilly - 50 LVREXL 2599



Accessories

Paintable skirtings

CASTLE

13.8 cm 1.8 cm 2 m
70 PSK2000-1

HIGH

10.2 cm 1.3 cm 2.3 m
70 PSK2300-3

COVER

10 cm 2.2 cm 2 m
70 PSK2000-2

MIDDLE

6.6 cm 1.3 cm 2.3 m
70 PSK2300-2

LOW

4 cm 1 cm 2.3 m
70 PSK2300-1

Discover all accessories

Matching design accessories

.... = matching design reference

MODERN

5.8 cm 1.3 cm 2.4 m
70MS8

Aluminium profiles

2001 Matte black 2002 Brushed aluminium 2003 Champagne bronze

T-PROFILE

8-15 mm 3.4 cm 2 m
70 ATP SC

REDUCER

8-15 mm 4.4 cm 2 m
70 ARP SC

END PROFILE

8-15 mm 2.6 cm 2 m
70 AEP SC

Series	Name	SKU Number	Length (mm)	Width (mm)	Thickness (mm)			Pieces / box	M² / box	± Weight box (kg)	M² / pallet
2100 W 2V E	Kylemore	50 LVREXL 4355	2100	305	15	•	•	2	1,28	19	65,28
	Chambord	50 LVREXL 4358	2100	305	15	•	•	2	1,28	19	65,28
	Saumur	50 LVREXL 4384	2100	305	15	•	•	2	1,28	19	65,28
2100 2V E	Monte	50 LVREXL 5188	2100	228	15	•	•	3	1,44	22	69,12
	Alhambra	50 LVREXL 5183	2100	228	15	•	•	3	1,44	22	69,12
	Bled	50 LVREXL 5152	2100	228	15	•	•	3	1,44	22	69,12
	Kantara	50 LVREXL 2515	2100	228	15	•	•	3	1,44	22	69,12
	Egmont	50 LVREXL 2553	2100	228	15	•	•	3	1,44	22	69,12
	Belvoir	50 LVREXL 2594	2100	228	15	•	•	3	1,44	22	69,12
	Montclair	50 LVREXL 2557	2100	228	15	•	•	3	1,44	22	69,12
	Windsor	50 LVREXL 2683	2100	228	15	•	•	3	1,44	22	69,12
	Fonteneau	50 LVREXL 2686	2100	228	15	•	•	3	1,44	22	69,12
	Chantilly	50 LVREXL 2599	2100	228	15	•	•	3	1,44	22	69,12



Saumur 50 LVREXL 4384

Installation

Easy installation

Coretec® floors have the easiest install on the market. Watch our installation video on our website www.coretecfloors.com or scan the QR code.

Maintenance

The Coretec® Clean, Quick & Green Kit

- Daily cleaner
- Deep cleaner
- Stain remover

Technical specifications (IT - SP - PT)

Level of use

Classe d'uso / Clasificación de uso /
Classe de utilização
Class 23 / 34 (EN ISO 10874)

Geometrical characteristics

Fantasie geometriche / Características
geométricas / Características geométricas
Conform (EN 17539)

Wear resistance

Resistenza all'usura / Resistencia al desgaste /
Resistência ao desgaste
Pass 7000 cycles (ISO 24338)

Castor chair resistance

Resistenza alle sedie con ruote / Resistencia
a sillas con ruedas / Resistência a cadeira de rodas
Pass 25 000 cycles (ISO 4918)

Effect of furniture leg

Effeto furniture leg / Efecto de la patade un mueble /
Efeito da perna do móvel
No visible change (EN 16581)

Residual indentation

Indentazione residua certificata / Huella residual /
Recuo residual
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining

Resistenza alle macchie / Resistencia al manchado /
Resistência a manchas
5 (no visible change) (EN 438-2)

Locking strength

Chiusura perfetta con sistema a click /
Resistencia a la tracción / Força de encaixe
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability

Stabilità dimensionale / Estabilidad dimensional /
Estabilidade dimensional
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light

Resistenza alla luce / Solidez del color a luz
artificial / Resistência da cor à luz
> grade 6 (EN ISO 105-B-02)

Impact sound reduction

Isolamento acustico / Aislamiento acústico /
Isolamento acústico
ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)

Formaldehyde emission class

Classe Formaldeide / Emisión formaldehído /
Classificação formaldeído
E1 (EN 717-1)

Fire classification

Classe di resistenza al fuoco / Resistencia al
fuego / Classificação de Fogo
Bfl - S1 (EN 13501)

Slip resistance

Coefficiente dinamico di attrito / Coeficiente de
fricción / Coeficiente de atrito
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating

Riscaldamento a pavimento / Calefacción por
suelo radiante / Aquecimento por piso radiante
Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance

Performance elettrostatica / Rendimiento
antiestático / Acumulação de cargas eletrostáticas
≤ 5 kV (EN 1815)

Thermal resistance

Resistenza al calore / Aislamiento térmico /
Isolamento térmico
0.1099 m²-K/W (EN 12667)

Technical specifications (FI - SV - NO - DK)

Level of use

Käyttöluokka / Klassificering användningsområde /
Bruksklasse / Anvendelsesgrad
Class 23 / 34 (EN ISO 10874)

Geometrical characteristics

Geometriset ominaisuudet / Geometrisk karakteristik /
Geometriske kjennetegn / Geometriske egenskaber
Conform (EN 17539)

Wear resistance

Kulutuksenkesto / Slitstyrka / Slitestyrke / Slidstyrke
Pass 7000 cycles (ISO 24338)

Castor chair resistance

Pyörällisen toimistotuolin kesto / Tålighet mot
rullhjul / Motstandsdyktighet / Modstandsdygtighed
over for hjulstol
Pass 25 000 cycles (ISO 4918)

Effect of furniture leg

Huonekalun jalkojen kesto / Verkan från möbelben /
Effekt møbelbein / Virkning af møbelben
No visible change (EN 16581)

Residual indentation

Jännöspainuma / Beständighet mot intrycks-
märken / Motstandsdyktighet mottrykke
mærker / Resterende indtryk
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining

Tahraantumisenkesto / Fläckbeständighet /
Motstandsdyktighet mot flekker /
Modstandsdygtighed over for pletter
5 (no visible change) (EN 438-2)

Locking strength

Lukituksen vahvuus / Låsningsstyrka /
Låsestabilitet / Låsningsstyrke
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability

Mittavakaus / Dimensionsstabilitet vid värmepåverkan /
Formstabilitet / Dimensionel stabilitet
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light

Valonkesto / Färghärdighet / Lysfasthet / Låsningsstyrke
> grade 6 (EN ISO 105-B-02)

Impact sound reduction

Askeläänen parannusarvo / Ljudisolering / Akustisk
isolasjon (lydisolering) / Reduktion af stødlyd
ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)

Formaldehyde emission class

Formaldehydiluokka / Formaldehydemission /
Formaldehyd emisjonsgruppe /
Formaldehydemissionsklasse
E1 (EN 717-1)

Fire classification

Paloluokka / Flamsäkerhet / Brannklasse /
Brandklassificering
Bfl - S1 (EN 13501)

Slip resistance

Kitka / Halksäkerhet / Sklimotstand / Skridsikkerhed
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating

Lattialämmitys / Värmegolv / Gulvvarme /Gulvvarme
Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance

Sähköstaattinen varautuminen / Prestanda statisk
elektricitet / Elektrostatisk ytelse (antistatisk) /
Elektrostatisk ydeevne
≤ 5 kV (EN 1815)

Thermal resistance

Lämmönvastus / Värmemotstånd /
Varmebestandighet / Termisk modstandsdygtighed
0.1099 m²-K/W (EN 12667)

Technical specifications (SK - PL - RU - HU - CZ - LT)

Level of use

Úroveň použitia / Klasa ścieralności / Класс
спользования / Európai besorolás / Úroveň použití /
Atsparumo klasė
Class 23 / 34 (EN ISO 10874)

Geometrical characteristics

Geometrické parametre / Charakterystyka
Geometryczna / геометрические характеристики /
Geometriai jellemző / Rozměry / Geometrinės savybės
Conform (EN 17539)

Wear resistance

Odolnosť voči opotrebeniu / Wytrzymałość na zużycie
/ износостойкость / Korásállóság / Odolnost proti
opotrebení / Atsparumas dilimui
Pass 7000 cycles (ISO 24338)

Castor chair resistance

Odolnosť voči kolieskam na stoličke / Odporność na
krzesła obrotowe z kółkami / Стойкость к креслам
с роликами / Görgös szék teszt / Odolnost vůči
kolečkovým židlým / Atsparumas kėdžių ratukams
Pass 25 000 cycles (ISO 4918)

Effect of furniture leg

Efekt z nôh nábytku / Wpływ nogi meblowej /
воздействие мебельных ножек / Bútorlábhatás /
Vliv nábytkové nožky / Baldų poveikis
No visible change (EN 16581)

Residual indentation

Trvalá deformácia / Pozostałe wgniecenie / остаточные
вмятины / Megmaradó benyomódás / Trvalá deformace
/ Likęs įdubimas
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining

Odolnosť voči napúšťaniu farbou / Odporność na
barwienie / устойчивость к пятнообразованию /
Foltállóság / Odolnost proti vzniku skvrn / Atsparumas
dėmėms
5 (no visible change) (EN 438-2)

Locking strength

Pevnosť pripojenia / Wytrzymałość blokowania /
прочность крепления / Záróerő / Pevnostzajištění /
Blokavimo jėga
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability

Rozmerová stabilita / Stabiłność wymiarowa /
Стабильность размеров / Méretstabilitás / Rozměrová
stabilita / Matmenų stabilumas
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light

Stálosť farby na svetle / Odporność koloru na światło /
устойчивость окраски к свету / Színtartósság /
Staiobarevnost na světle / Spalvų atsparumas šviesai
> grade 6 (EN ISO 105-B-02)

Impact sound reduction

Akustická izolácia / Izolacja akustyczna Звукоизоляция /
Hangszigetelés / Akustická izolace / Garso slopinimas
 $\Delta L_w = 20$ dB (ISO 10140-3 / EN 717-2)

Formaldehyde emission class

Formaldehydová skupina / Emisja formaldehydu /
Класс эмиссии формальдегида / Formaldehyd csoport /
Formaldehydová skupina / Formaldehyde group
E1 (EN 717-1)

Fire classification

Klasifikácia voči požiaru / klasyfikacja ogniowa / класс
огнестойкости / Tűzállósági osztály / Požární klasifikace
/ Degumo klasifikacija
Bfl - S1 (EN 13501)

Slip resistance

Protišmykovosť / Śliskość / Стойкость к скольжению /
Csúszásmentes / Protiskluznost / Slidumo klasė
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating

Podlahové vykurovanie / Ogrzewanie podłogowe /
Полы с подогревом / Padlófűtésre / Podlahové
vykurování / Šildomos grindys
Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance

Elektrostatické prevedenie / Akumulacja ładunków
elektrostatycznych / Электростатичность / Elektromos
feltöltődés / Elektrostatické provedení / Antistatškumas
≤ 5 kV (EN 1815)

Thermal resistance

Termelná odolnosť / Odporność cieplna / термостойкость
/ Hőállóság / Teplotní odolnost / Terminis atsparumas
0.1099 m²-K/W (EN 12667)



Egmont 50 LVREXL 2553

It's in our **core** to adore nature

Our commitments



Choose me once, love me for life

We believe in a world where things last! For a lifetime, and longer. That's good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.



Breathe healthy air

The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.



Sustainable cork underlay

Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO₂ emissions.



We can prove it

Don't take our word for it, look at the proof! Coretec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.



Second Life

So you're changing your floor? Why not give the old Coretec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.



Do your bit for forest conservation

There is no wood in a Coretec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.



Coretec®



**Coretec® floors are
that good, somebody else
can re-enjoy it.**

Learn how your Coretec® floor gets a second life.



Coretec®, the natural choice



Lifetime
warranty
residential



10 year
warranty
commercial



Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.
Garanzia (anni) La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.
Garantía (años) La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.
Garantia (anos) A garantia cobre defeitos industriais e uso prematuro usado normal.
Takuu (vuosi) Takuu kattaa valmistusvirheet ja normaalista käytöstä johtuvan pinnan puhkikulumisen.
Garanti (år) Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.
Garanti (år) Garantien gäller tillverkningsfel och för tidig utslitning vid normalt användande.
Garanti (år) Garantien gælder for fabrikationsfejl og for tidlig slid ved normal brug.
Záruka (rok) Záruka sa vzťahuje na výrobné chyby a predčasné opotrebenie v prípade bežného používania.
Termin gwarancji (rok) Gwarancja obejmuje wadyfabryczne i przedwczesne zużycie w przypadku normalnego użytkowania.
Гарантия (лет) Гарантия покрывает производственные дефекты и преждевременный износ при нормальном использовании.
A garancia gyártási hibákra és idő előtti elhasználódásra általános használatnál érvényes.
Záruka (rok) Záruka se vzťahuje na vady z výroby a predčasné opotrebení v prípade bežného používání.
Garantija (Metali) Garantija taikoma gamybos trūkumams ir per greitam nusidėvėjimui eksploatuojant normaliomis sąlygomis

Coretec®

Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be - www.coretecfloors.com



US FLOORS INTERNATIONAL BV, A PROUD DIVISION OF  INDUSTRIES