

TYTAN

DURABLE PVC-FREE FLOORS



Coretec®



Trust in every step

Choosing the right floor can be overwhelming. Some people prioritise aesthetics, some go for quality and others opt for ease of use. Instead of compromising, we've combined the best of all worlds in one floor: Coretec®. Aesthetically refined, but also exceptionally durable. Comfortable to walk on, yet also waterproof and wear resistant. Easy to install and maintain.

That's trust in every step.

Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

100% waterproof floors

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all Coretec® floors come with a lifetime residential warranty.

Easy to maintain

Cleaning our floors is child's play. Thanks to our high performance wear layers, Coretec® floors are easy to clean and easy to maintain.

Time saving solution

Coretec® is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.



impact proof

All Tytan floors handle heavy loads and wear with ease, thanks to our Dura Core® technology.



PVC-free

All floors in this collection are 100% PVC-free and free from harmful chemicals, meeting the highest standards for health and the environment.



scratchless

Designed for life's busiest spaces, these floors offer superior durability with a class 23/34 rating - perfect for both residential and commercial use.



waterproof

All Tytan floors are 100% waterproof, offering durable protection in kitchens, bathrooms, and damp environments.



Dura Core® 9 mm

The most sustainable, PVC-free floor

Protective stain,
scratch & scuff
resistant thermal
resin top layer
Class 23/34




Design layer

Dura Core®
a mineral composite core with
extra dent & impact resistance

Balancing layer

Attached cork underlayment

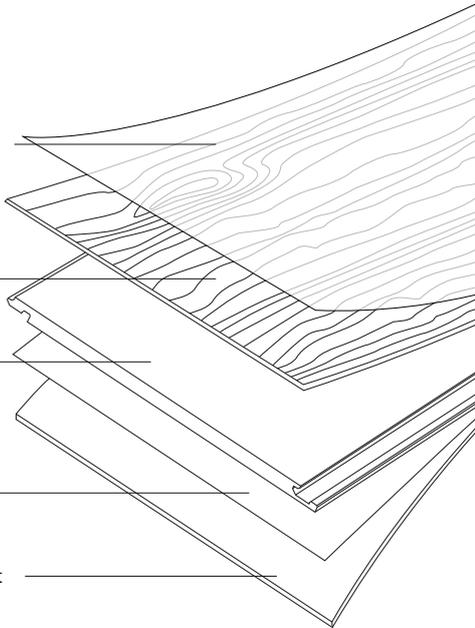

Coretec



100% waterproof



Ideal for underfloor
heating & cooling



Extremely stable



Wear resistant



No acclimatisation
necessary



Pet proof



Easy to install



Electrostatic
performance



Installation on
any surface



Reduces noise

2200 mm
230 mm

Atlas

50 TYT 05255



9 mm



Protective stain, scratch
& scuff resistant thermal
resin top layer



Matching design skirting
70 SK130 255



Bevels on the long
& short sides



The embossing follows
the structure of the wood
for a real-life touch



2200 mm
230 mm

Cronus

50 TYT 05258



9 mm



Protective stain, scratch
& scuff resistant thermal
resin top layer



Matching design skirting
70 SK130 258




Bevels on the long
& short sides



The embossing follows
the structure of the wood
for a real-life touch



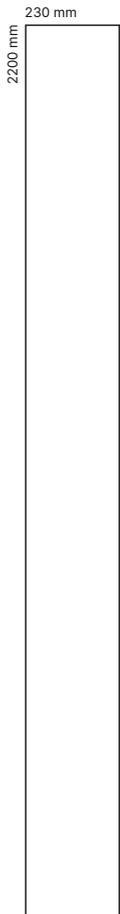

Dione

50 TYT 05285



9 mm



Protective stain, scratch
& scuff resistant thermal
resin top layer



Matching design skirting
70 SK130 285




Bevels on the long
& short sides



The embossing follows
the structure of the wood
for a real-life touch



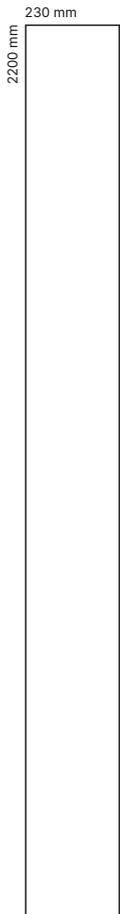

Leto

50 TYT 05287



9 mm



Protective stain, scratch
& scuff resistant thermal
resin top layer



Matching design skirting
70 SK130 287



Bevels on the long
& short sides



The embossing follows
the structure of the wood
for a real-life touch





**True natural
appearance**

Coretec®

230 mm
2200 mm

Asteria

50 TYT 05312



9 mm



Protective stain, scratch
& scuff resistant thermal
resin top layer



Matching design skirting
70 SK130 312



Bevels on the long
& short sides



The embossing follows
the structure of the wood
for a real-life touch



230 mm
2200 mm

Rhea

50 TYT 05356



9 mm



Protective stain, scratch
& scuff resistant thermal
resin top layer



Matching design skirting
70 SK130 356



Bevels on the long
& short sides



The embossing follows
the structure of the wood
for a real-life touch



2200 mm
230 mm

Selene

50 TYT 05384



9 mm



Protective stain, scratch
& scuff resistant thermal
resin top layer




Matching design skirting
70 SK130 384



Bevels on the long
& short sides



The embossing follows
the structure of the wood
for a real-life touch

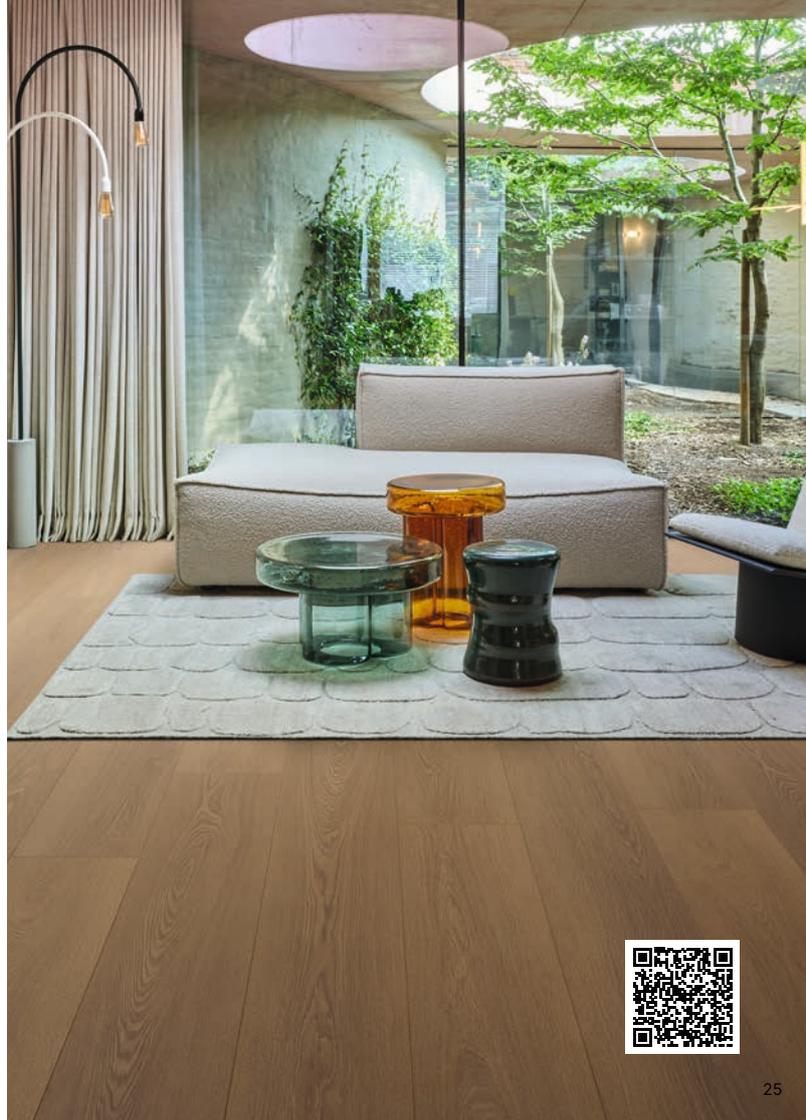


Accessories

TYTAN

Matching design accessories

* ... = last 3 numbers of colour ref.




SKIRTING

70 SK130 ...

① 6 cm ② 1.2 cm ③ 2.4 m

Paintable skirtings




COVER

70 PSK2000-2

① 10 cm ② 2.2 cm ③ 2 m


Paintable skirtings



LOW

70 PSK2300-1


📏 4 cm 📏 1 cm 📏 2.3 m



MIDDLE

70 PSK2300-2


📏 6.6 cm 📏 1.3 cm 📏 2.3 m



HIGH

70 PSK2300-3

📏 10.2 cm 📏 1.3 cm 📏 2.3 m




CASTLE

70 PSK2000-1

📏 13.8 cm 📏 1.8 cm 📏 2 m


Aluminium profiles

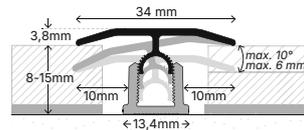

T-PROFILE

- 70 ATP 2001 SC
- 70 ATP 2002 SC
- 70 ATP 2003 SC


📏 8-15 mm 📏 3.4 cm 📏 2 m

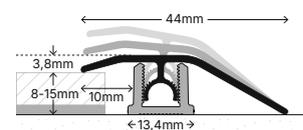

REDUCER

- 70 ARP 2001 SC
- 70 ARP 2002 SC
- 70 ARP 2003 SC

📏 8-15 mm 📏 4.4 cm 📏 2 m

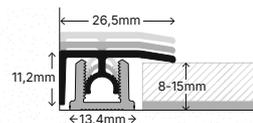

END PROFILE

- 70 AEP 2001 SC
- 70 AEP 2002 SC
- 70 AEP 2003 SC

📏 8-15 mm 📏 2.6 cm 📏 2 m

Available colours



2001
Matte
black



2002
Brushed
aluminium



2003
Champagne
bronze



**Coretec® floors are
that good, somebody else
can re-enjoy it.**



Technical specifications

Level of use Class 23 / 34 (EN ISO 10874)	Colour fastness to light ≥ 6 (EN ISO 105-B-02)
Geometrical characteristics Conform (EN 17539)	Impact sound reduction 17 dB (ISO 10140-3 / EN 1717-2)
Wear resistance Pass 4000 cycles (ISO 24338)	Formaldehyde emission class E1 (EN 717-1)
Castor chair resistance Pass 25000 cycles (EN 4918)	Fire classification Bfl - S1 (EN 13501)
Effect of furniture leg No visible change (EN 16581)	Slip resistance DS - R9 (EN 13893 - DIN 51130)
Residual indentation ≤ 0.15 mm (EN ISO 24343-1)	Underfloor heating Suitable (see: Underfloor heating guidelines)
Resistance to staining 5 (no visible change) (EN 438-2)	Electrostatic performance ≤ 2 kV (EN 1815)
Locking strength LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)	Thermal resistance 0.0339 m ² -K/W (EN 12667)
Dimensional stability Pass ≤ 0.25% (EN ISO 23999)	Packaging 3 pcs / 1,52 m ² / ± 19 kg



Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.

Coretec®

Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be - www.coretecfloors.com



US FLOORS INTERNATIONAL BV, A PROUD DIVISION OF  INDUSTRIES